


# LED DISPLAY

## HIGH QUALITY FULL COLOUR LED DISPLAY

VISBANC Ultra Fine Pitch LED Video Wall

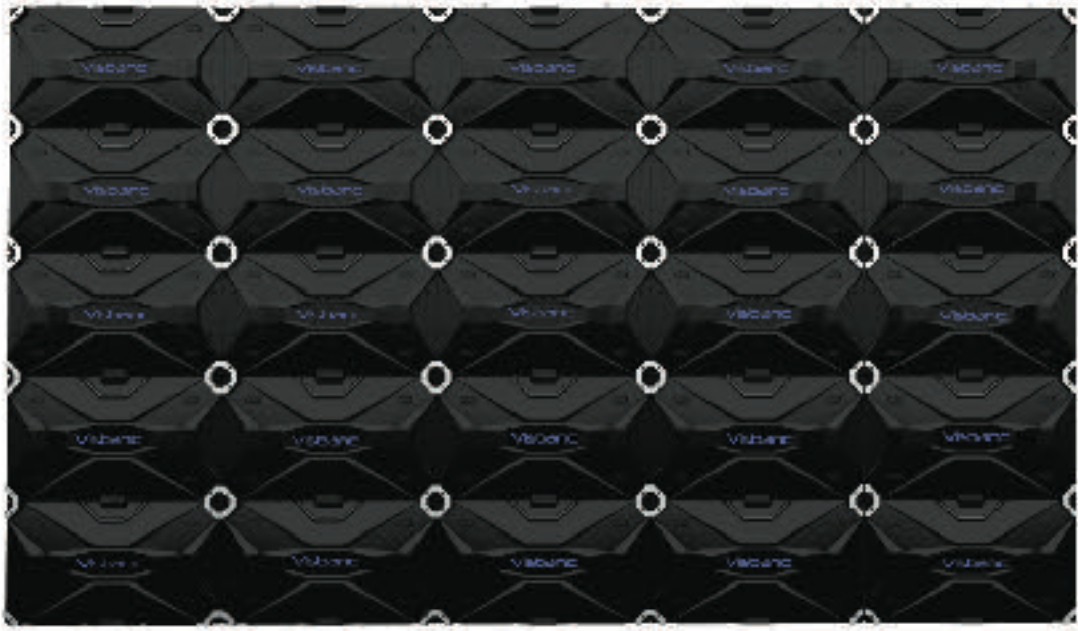

-  Front Maintenance
-  Light Weight
-  Ultra Slim
-  High Definition
-  Noise Free

- Die cast aluminum cabinet, light-weight and ultra thin
- 16:9 cabinet ratio enable perfect setup for 16:9 and 4:3 format screen
- Magnetic front fix IM design for wall mounted application
- All round flatness adjustment design ensure perfect flatness
- Memory on board IM design for perfect uniformity
- Low power consumption, noise-free design
- Large viewing angle, high refresh rate, high contrast ratio
- EMC class-B certified



Visbanc

Parameter	Unit	T 1.25	T 1.5	T 1.9
Pixel Pitch	mm	1.269	1.586	1.903
Brightness	nits	600	600	800
Pixel configuration	R/G/B	SMD 3 in 1		
Color Temperature	deg K	6500		
Viewing angle - Horizontal (50% brightness)	deg.	160 (+80 / -80)		
Viewing angle - Vertical (50% brightness)	deg.	140 (+70 / -70)		
Recommended minimum viewing distance	m	1.25	1.5	1.9
Pixel Width	mm	609		
Pixel Height	mm	342.56		
Pixel depth	mm	75		
Panel area		0.21		
Panel material		Aluminum		
Panel weight	Kg	10		
Ingress protection (front/back)	IP	30 / 30		
Pixel matrix per panel		480 * 270	384 * 216	320 * 180
Brightness control		255		
Digital processing	bit	13	13	13
Frame rate	Hertz	50 / 60		
Display refresh rate	Hertz	2520	2520	2520
Input voltage	VAC	100 ~ 240		
Input power frequency	Hertz	50 ~ 60		
Input power (Max.)	W / m <sup>2</sup>	620	550	830
Input power (Avg.)	W / m <sup>2</sup>	217	192	290
Operating temperature range	deg. C	- 10 ~ + 40		
Lifetime (50% brightness)	Hours	60000		

## CONTACT

Email: [support@visbanc.com](mailto:support@visbanc.com)

Website: [www.visbanc.com](http://www.visbanc.com)